


# MDrive<sup>®</sup> Hybrid

Integrated motion systems with  
Hybrid Motion Technology™



**MDrive 34ac Hybrid**  
Motion Control

**IMS**  
INTELLIGENT MOTION  
SYSTEMS, INC.

**Schneider**  
 **Electric**



MDrive® Hybrid Motion Control, fully programmable  
 Sizes: 17, 23 & 34ac

### Presentation

The MDrive® Hybrid Motion Control is a very compact motion system that solves many servo applications with a low cost solution. The system includes a 1.8° 2-phase stepper motor integrated with a fully programmable controller, high performance microstepping drive, internal encoder integral to system operation, and Hybrid Motion Technology™ (HMT). HMT combines the best of servo and stepper motor technologies, while delivering unique capabilities and enhancements over both. These stand-alone motion control solutions can be used without any external controller.

With MDrive Hybrid integrated motion control systems, point-to-point positioning, torque mode and velocity control are all user programmed with pre-installed MCode software, a simple language that uses 1 to 2 character instructions, and an easy-to-use terminal emulator program that is provided. Communication is via RS-422/485 or Ethernet. (1)

MDrive Hybrid systems with Ethernet are programmed with the same MCode instruction set used for the RS-422/485 products. Ethernet products also support MODBUS/TCP application protocol, per specification Version 1.1b, with operation in immediate mode, not as programmable products.

A USB to RS-422/485 Communications Converter is available for ease of connecting to a user's PC. Connectivity options range from all-inclusive QuickStart Kits to individual interfacing cables and mating connector kits to build your own cables.

### Application areas

The MDrive Hybrid is ideal for machine builders who want a low cost alternative to servo motors and brushed DC motors. The highly compact, integrated electronics of the MDrive Hybrid reduce the potential for problems due to electrical noise by eliminating the cable between motor and drive. This stepper-based system requires no tuning, and provides real-time closed loop control through an internal encoder.

These compact, powerful and cost effective motion control solutions deliver unsurpassed smoothness and performance that will reduce system cost, design and assembly time for a large range of motor applications — both servo and stepper.

### Features

- Highly integrated microstepping drive and high torque 1.8° 2-phase stepper motor
- Fully programmable motion controller
- HMT control for exceptional performance
- Internal encoder
- Single supply: from +12 up to +75 VDC or 120 and 240 VAC
- Cost effective
- Extremely compact
- 20 microstep resolutions up to 51,200 steps per rev including: Degrees, Metric, Arc Minutes
- Several motor stack lengths available
- Available options:
  - Long life linear actuator (2)
  - Rear control knob for manual position
  - QuickStart Kit
  - Drive Protection Module
- Graphical user interface provided for quick and easy configuration and programming

(1) Ethernet only available with MDrive23Hybrid systems.

(2) Only available with MDrive23Hybrid systems. See separate documentation.

Motion Control specifications						
Input power	Voltage	VDC	MDrive 17	MDrive 23	MDrive 34ac	
		VAC	12 to 48	12 to 60	—	—
	Current maximum (1)		2.0A	3.5A	120	240
Thermal	Operating temp non-condensing	Heat sink	-40° to +85°C	-40° to +85°C	95 to 132 VAC @ 50/60 Hz	
		Motor	-40° to +100°C	-40° to +100°C	95 to 264 VAC @ 50/60 Hz	
	Open-drain type		not applicable	not applicable	-40° to +75°C	
Protection	Type		over temperature, short circuit, transient over voltage, over voltage, inductive clamp			
Auxiliary logic input	Voltage range (2)		+12 to +24 VDC			
Analog input	Resolution		10 bit			
General purpose I/O	Voltage range		0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA			
	Number		8			
	Type		sourcing or sinking outputs/inputs			
	Logic range		Sourcing outputs +12 to +24 VDC			
	Output sink/source current		Inputs and sinking outputs tolerant to +24 VDC, inputs TTL level compatible			
Communication	Protection		Up to 600 mA per channel			
	Type		Over temp, short circuit, transient, over voltage, inductive clamp			
	Baud rate		RS-422/485 or Ethernet (3)			
Motion	Closed loop configuration with encoder	Encoder type	4.8 to 115.2 kbps (4)			
		Steps per revolution	Internal, magnetic			
		Encoder resolution	51200			
	Counters	Type	1000 lines/4000 edges per rev			
		Edge rate maximum	position, encoder/32 bit			
	Velocity	Range	5 MHz			
		Resolution	+/- 5,000,000 steps per second			
	Accel/Decel	Range	0.5961 steps per second			
		Resolution	1.5 x 10 <sup>9</sup> steps per second <sup>2</sup>			
	High speed I/O	Position capture	Input filter range	90.9 steps per second <sup>2</sup>		
			Resolution	50 nS to 12.9 µS (10 MHz to 38.8 kHz)		
		Trip Output	Speed/resolution/threshold	32 bit		
Software	Program storage	Type/size	flash/6384 bytes			
	User registers		Four 32 bit			
	User program labels & variables		192			
	Math functions		+, -, x, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT			
	Branch functions		Branch and Call			
	General purpose I/O functions	Inputs	home, limit plus, limit minus, go, stop, pause, jog plus, jog minus, general purpose			
		Outputs	moving, fault, stall, velocity change, general purpose			
	Trip functions		Trip on input, trip on position, trip on time, trip capture, trip on relative position			
	Party mode addresses		62 (4)			
	Encoder functions		Find index			

(1) Actual power supply current will depend on voltage and load.  
 (2) When input voltage is removed, maintains power only to control and feedback circuits.  
 (3) Ethernet only available with MDrive23Hybrid systems.  
 (4) Only with RS-422/485 systems.


**Programming**

RS-422/485 MDrive Hybrid systems  
 Fully programmable. Users can quickly communicate and program via a PC using IMS Terminal, an integrated ASCII terminal emulator and program editor available for download at [www.imshome.com](http://www.imshome.com).

Ethernet MDrive Hybrid systems  
 These products support two protocols in a single package:  
 MCode/TCP — These fully programmable systems utilize Schneider Electric Motion USA's proprietary MCode programming language, developed for MDrive Motion Control products, which has been adapted to utilize TCP/IP message formatting.  
 MODBUS/TCP — A standard open industrial protocol supported by a variety of machine components such as programmable controllers, drives and controls, I/O modules and switches.

 See User Manual for complete details: [www.imshome.com/manuals.html](http://www.imshome.com/manuals.html)


**Mechanical specifications, dimensions in inches (mm)**

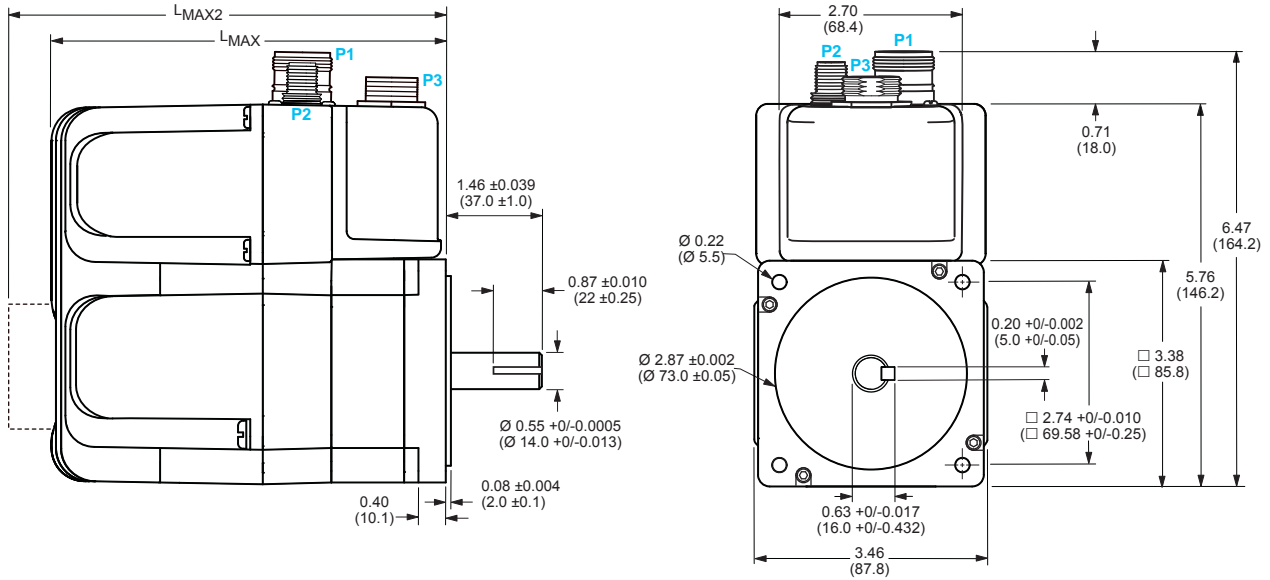


Motor stack length	Lmax (1)	Lmax2 (2)
Single	6.1 (155.0)	7.1 (180.4)
Double	6.9 (174.3)	7.9 (199.7)
Triple	8.4 (214.3)	9.4 (239.7)

(1) Single shaft.  
(2) Control knob.


**Connectors**



P1: 19-pin M23 (male) industrial connector




P2: 5-pin M12 (female) industrial connector



P3: 3-pin Euro AC (male) industrial connector

**Lmax2 option**






control knob

# MDrive® 34 ac Hybrid

## Motion Control

### fully programmable

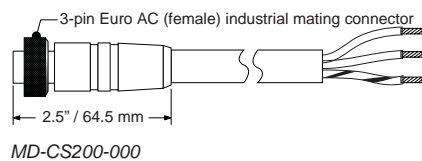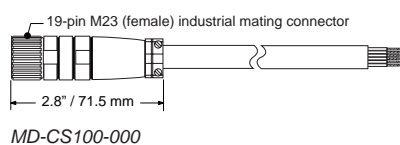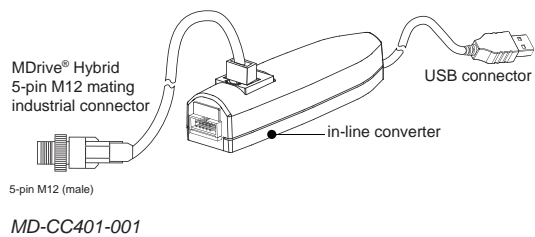

### Installation accessories

Description	Length feet (m)	Part number
-------------	-----------------	-------------

#### QuickStart Kit

For rapid design verification, all-inclusive QuickStart Kits include connectivity, instructions and CD for MDrive Hybrid initial functional setup and system testing.

- For MDrive34ac Motion Control systems — add "K" to part number (1)

#### Communication converter

Electrically isolated, in-line converter pre-wired with mating connector to conveniently set/program communication parameters for a single MDrive Hybrid via a PC's USB port.

- Mates to 5-pin female M12 industrial connector 12.0 (3.6) **MD-CC401-001**

#### Prototype development cable

Speed test/development with pre-wired mating connector with other cable end open.

- Mates to 19-pin male M23 industrial connector with straight termination for I/O 13.0 (4.0) **MD-CS100-000**
- Mates to 19-pin male M23 industrial connector with right angle termination for I/O 13.0 (4.0) **MD-CS101-000**
- Mates to 3-pin male Euro AC industrial connector with straight termination for power 13.0 (4.0) **MD-CS200-000**
- Mates to 3-pin male Euro AC industrial connector with right angle termination for power 13.0 (4.0) **MD-CS201-000**

(1) See page 28.




Connectivity details: [www.imshome.com/connect.html](http://www.imshome.com/connect.html)

# MDrive® 34 ac Hybrid

Motion Control  
fully programmable

MDrive® 34ac Hybrid



- P1: I/O**  
M = 19-pin M23 male industrial connector
- P3: Power**  
3-pin industrial connector
- P2: Communication**  
Q = RS-422/485 with 5-pin M12 female industrial connector

## Motion Control Part numbers


<b>Example:</b>	<b>K</b>	<b>M</b>	<b>A</b>	<b>I</b>	<b>4</b>	<b>M</b>	<b>R</b>	<b>Q</b>	<b>3</b>	<b>4</b>	<b>A</b>	<b>1</b>	<b>-EJM</b>	<b>-N</b>
<b>QuickStart Kit</b> K = kit option, or leave blank if not wanted	<b>K</b>	M	A	I	4	M	R	Q	3	4	A	1	-EJM	-N
<b>MDrive Hybrid version</b> MAI = Motion Control	K	<b>M</b>	<b>A</b>	<b>I</b>	4	M	R	Q	3	4	A	1	-EJM	-N
<b>Type</b> 4 = HMT with industrial connectors, IP54-rated	K	M	A	I	<b>4</b>	M	R	Q	3	4	A	1	-EJM	-N
<b>P1 connector</b> M = M23 industrial connector	K	M	A	I	4	<b>M</b>	R	Q	3	4	A	1	-EJM	-N
<b>Communication</b> R = RS-422/485	K	M	A	I	4	M	<b>R</b>	Q	3	4	A	1	-EJM	-N
<b>P2 connector</b> Q = industrial, IP54-rated	K	M	A	I	4	M	R	<b>Q</b>	3	4	A	1	-EJM	-N
<b>Motor size</b> 34 = NEMA 34 (3.4" / 86 mm)	K	M	A	I	4	M	R	Q	<b>3</b>	<b>4</b>	A	1	-EJM	-N
<b>Motor length</b> A = single stack B = double stack C = triple stack	K	M	A	I	4	M	R	Q	3	4	<b>A</b>	1	-EJM	-N
<b>Drive voltage</b> 1 = 120 VAC 2 = 240 VAC	K	M	A	I	4	M	R	Q	3	4	A	<b>1</b>	-EJM	-N
<b>Encoder, differential</b> -EJM = 1000-line internal encoder	K	M	A	I	4	M	R	Q	3	4	A	1	<b>-EJM</b>	<b>-N</b>
<b>Option</b> Leave blank if not wanted														<b>-N</b>

-N = rear control knob for manual positioning

 Easy MDrive part numbers via an interactive tool at: [www.imshome.com/MDrivePlus.html](http://www.imshome.com/MDrivePlus.html)

Motor specifications MDrive 34 ac Hybrid		Holding torque	Detent torque	Rotor inertia	Weight (motor + driver)
Motor stack length	Single	330.0 oz-in / 233.0 N-cm	10.9 oz-in / 7.7 N-cm	0.01416 oz-in-sec <sup>2</sup> / 1.0 kg-cm <sup>2</sup>	6.4 lb / 2.9 kg
	Double	500.0 oz-in / 353.0 N-cm	14.16 oz-in / 10.0 N-cm	0.02266 oz-in-sec <sup>2</sup> / 1.6 kg-cm <sup>2</sup>	7.7 lb / 3.5 kg
	Triple	750.0 oz-in / 529.0 N-cm	19.83 oz-in / 14.0 N-cm	0.04815 oz-in-sec <sup>2</sup> / 3.4 kg-cm <sup>2</sup>	11.0 lb / 5.0 kg

**Speed torque characteristics MDrive 34 ac Hybrid**

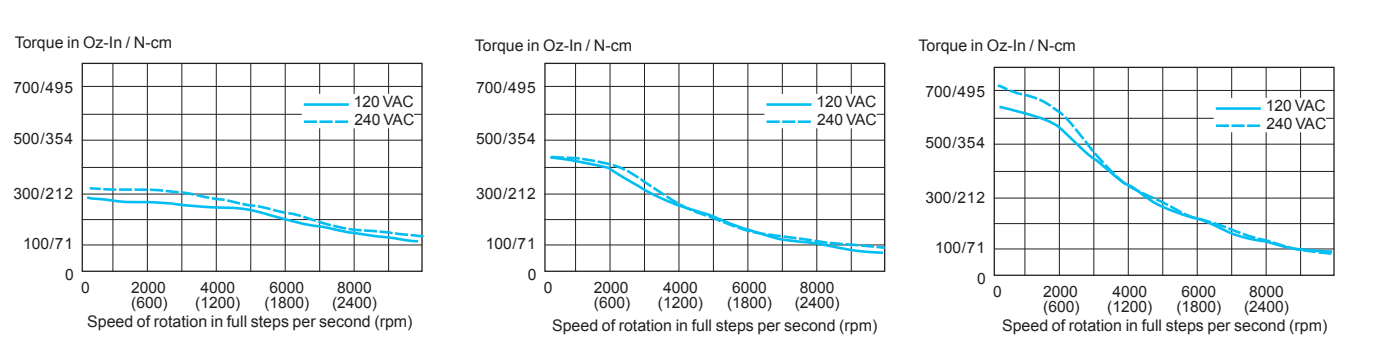

#### **USA SALES OFFICES**

##### **Eastern Region**

Tel. 862 208-9742 - Fax 973 661-1275  
e-mail: e.region@imshome.com

##### **Northeast Region**

Tel. 860 368-9703  
e-mail: n.region@imshome.com

##### **Central Region**

Tel. 860 295-6102  
e-mail: c.region@imshome.com

##### **Western Region**

Tel. 602 578-7201  
e-mail: w.region@imshome.com

#### **IMS EUROPEAN SALES MANAGEMENT**

4 Quai Des Etroits  
69005 Lyon, France  
Tel. +33/4 7256 5113 - Fax +33/4 7838 1537  
e-mail: europe.sales@imshome.com

#### **TECHNICAL SUPPORT**

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107  
e-mail: etech@imshome.com

#### **Schneider Electric Motion USA**

370 North Main Street, P.O. Box 457  
Marlborough, CT 06447 - U.S.A.  
Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107  
e-mail: info@imshome.com  
www.schneider-electric-motion.us